

# CapStone™

Reduce Costs 20-30% Over the 5335.



CapStone provides a laser-based FPC processing solution that utilizes a new generation of laser technology and laser control capabilities to simultaneously

deliver high-quality, high-speed via drilling at up to and beyond twice the throughput of the model 5335.



The CapStone™ UV-laser drilling system provides leading-edge FPC manufacturers with a highthroughput laser-based solution for processing flexible circuit interconnects at higher levels of precision—even on thinner materials. Breakthrough productivity using laser and laser control technology optimized for FPC processing enables flex PCB manufacturers to extend their capabilities and cost-effectively address a wider range of requirements associated with high-volume flex processing at up to and beyond 30% more cost-effectively than the 5335.

## Revolutionary laser control maximizes blind via throughput and yields.


Dramatically increase your blind via processing speeds using ESI's new, patented DynaClean™ feature that turns your multi-pass blind via process into a single pass. Minimize heat effects with up to 10m/s via drilling process velocities using AcceleDrill™ beam positioning technology.

## High-performance laser drives efficiency and lowers costs.

Highest UV nsec FPC drilling industry repetition rate with optimized laser characteristics delivers higher throughput and wider process windows. Laser designed and tested in high-volume 24/7 manufacturing environments to extend laser life and reduce maintenance requirements.

## Process a wide range of current and next-generation materials.

CapStone applies ESI's decades of laser-material interaction expertise to provide higher performance. This enables FPC manufacturers to drill high-density designs with an increased yield—while limiting incidental damage.

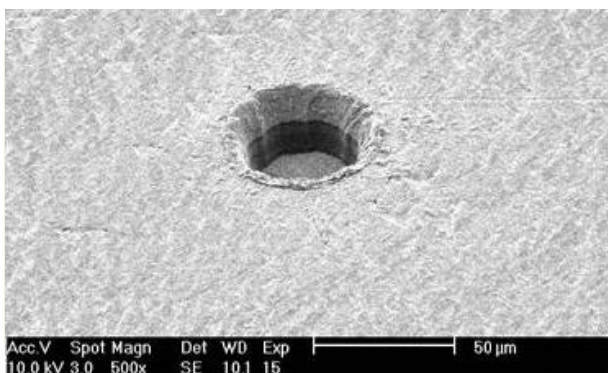

## Extend Your Flex Processing Capabilities

- Highest productivity and yields for small blind and through vias in thin materials
- High-quality vias down to 25 μm
- Custom-designed laser optimized for wide process window and high productivity

## System Specifications

### Laser

Type	355nm wavelength
Pulse Rate for Via Formation	300 kHz
Average Power	>11.4W @ 300 kHz

### Laser Beam Positioning

Type	Cross-axis with galvanometer (Laser beam moves in XY, part moves in Y axis)
Panel Size	533 mm x 635 mm
Accuracy	± 15um  M +3s over entire panel area
Maximum Drilling Velocity	10,000 mm/s
Controller	ESI custom DSP-based controller

### Main Stage

Type	Cross axis
Motor Type	Brushless linear motors

### Secondary Stage

Type	XY Galvanometer
Controller	High-speed custom digital control

### Tertiary Stage

Type	XY Acousto Optical Deflectors
Controller	High-speed custom digital control

### Laser Power Control

Long Term Stability	±2.5% + 50 mW
Feedback	Closed Loop
Power Control	Precision Pulse™ real-time

### Features:

Third Dynamics™, AcceleDrill™, and DynaClean™

### Programmable Z Stage

Resolution	1 μm
Maximum Average Velocity	>10 mm/s
Repeatability	± 10 μm
Travel	25 mm

### Automatic Alignment and Illumination

Coarse Camera Field of View	30 mm diagonal
Fine Camera Field of View	2 mm diagonal
Detection Device	CCD, monochrome
Illumination	LED

### System Control Computer

Type	IBM® PC compatible
Hard Drive	Dual 500GB in RAID1 configuration
Monitor	17" LCD flat panel
Input Devices	Keyboard and trackball

### System Software

Operating System	Microsoft Windows 7
Network Compatibility	TCP/IP, 10/100/1000 GBE
Toolpath Generation Software	esiCAM
Drill File Formats	DXF, ASCII, Excellon I and II, Sieb & Meier and Gerber

### Automation Capability

Software, mechanical and electrical interfaces provide the capability to attach web and panel material handlers to the system.

**Ask an Expert! For facilities guidelines, requirements or more information, please contact your local MKS representative or visit [www.esi.com](http://www.esi.com).**